plybooQuiet™

FSC
www.fsc.org
FSC® C012079
The mark of responsible forestry

PlybooQuiet™ PQ-19

FSC® Certified
FloorScore® Certified
Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 6' Lengths
- 25 year warranty
- **Soybond** Formaldehyde Free Manufactured Flooring

SoyBond™ flooring and plywood

floor score
Cert.# SCS-FS-02130
As Certified by
SCIENTIFIC CERTIFICATION SYSTEMS

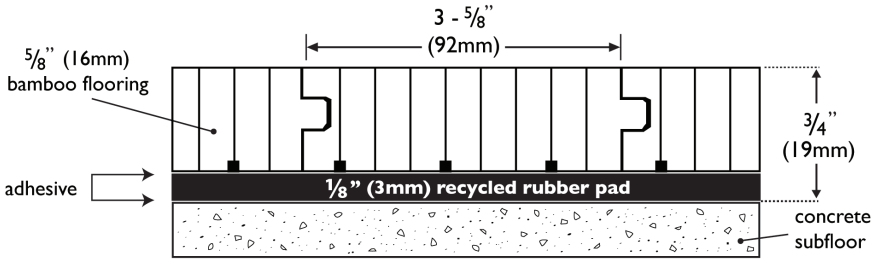

Plank Dimensions: 5/8" x 3 5/8" x 72"

Edge Grain, Amber
FL-V5872PA-NAUF/FSC
(Pre-finished)
FL-V5872UA-NAUF/FSC
(Unfinished)

Flat Grain, Amber
FL-5872PA-NAUF/FSC
(Pre-finished)
FL-5872UA-NAUF/FSC
Unfinished)

Edge Grain, Natural
FL-V5872PN-NAUF/FSC
(Pre-finished)
FL-V5872UN-NAUF/FSC
(Unfinished)

Flat Grain, Natural
FL-5872PN-NAUF/FSC
(Pre-finished)
FL-5872UN-NAUF/FSC
(Unfinished)

PlybooQuiet™ Strand PQ-18

FSC® Certified
FloorScore® Certified
Urea Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 6' Lengths
- 25 year warranty
- PlybooPure, No Added Urea-Formaldehyde

PlybooPure
UREA-FORMALDEHYDE FREE

floor score
Cert.# SCS-FS-02130
As Certified by
SCIENTIFIC CERTIFICATION SYSTEMS

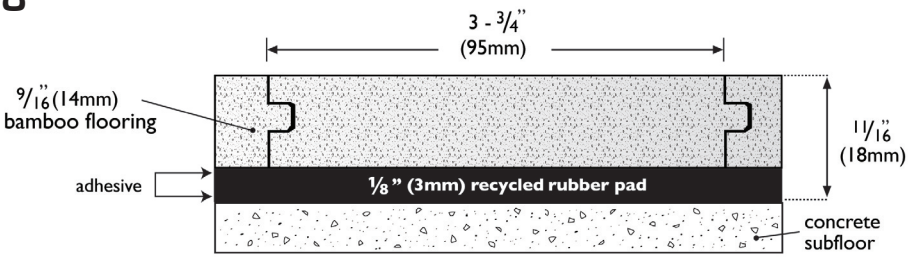

Plank Dimensions: 9/16" x 3 3/4" x 72"

Neopolitan
Inquire for Pre-finished
FL-P5872UNEO-NAUF/FSC
(Unfinished)

PlybooStrand Sahara
FL-P5872PH-NAUF/FSC
(Pre-finished)
FL-P5872UH-NAUF/FSC
(Unfinished)

PlybooStrand Havana
FL-P5872PD-NAUF/FSC
(Pre-finished)
FL-P5872UD-NAUF/FSC
(Unfinished)

PlybooQuiet™ Strand PQ-13

FSC® Certified
FloorScore® Certified
Urea Formaldehyde Free

- Noise Reduction .125" Padding
- L.E.E.D. Contributions: MR4, MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Greater Dimensional Stability than Maple
- Precision Milling, Fit, and Finish
- 3' Lengths
- 25 year warranty
- PlybooPure, No Added Urea-Formaldehyde

PlybooPure
UREA-FORMALDEHYDE FREE

floor score
Cert.# SCS-FS-02130
As Certified by
SCIENTIFIC CERTIFICATION SYSTEMS

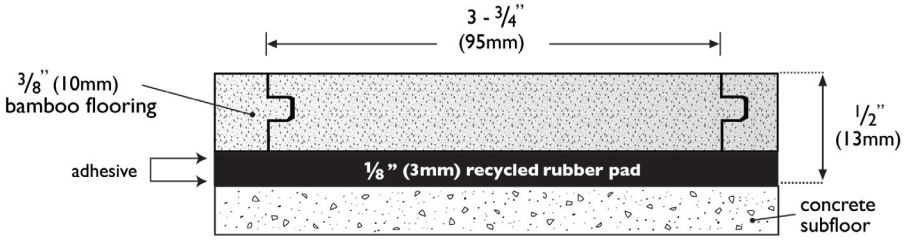

Plank Dimensions: 3/8" x 3 3/4" x 36"

Neopolitan
FL-P3836NEO-NAUF/FSC
(Pre-finished)

PlybooStrand Sahara
FL-P3836PH-NAUF/FSC
(Pre-finished)


PlybooStrand Havana
FL-P3836PD-NAUF/FSC
(Pre-Finished)

plybooQuiet

Amber Edge Grain
FL-V5872PA-NAUF/FSC
FL-V5872UA-NAUF/FSC

Natural Edge Grain
FL-V5872PN-NAUF/FSC
FL-V5872UN-NAUF/FSC

Amber flat Grain
FL-5872PA-NAUF/FSC
FL-5872UA-NAUF/FSC

Natural Flat Grain
FL-5872PN-NAUF/FSC
FL-5872UN-NAUF/FSC

-

PlybooQuiet : PQ-19

-

End View Detail

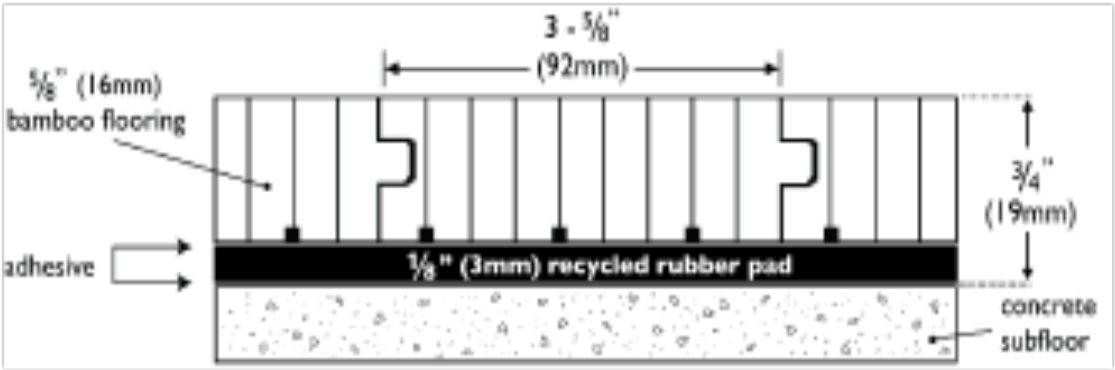

Top View Detail

-

System Components

		Profile		
Top	**Plyboo bamboo surface** **5/8"x 3 5/8" x 72"** (16mm x 92 mm x 1829mm)	**0.625"**	**5/8"**	**16mm**
Base	**1 layer of 1/8" PlybooQuie acoustical padding** **(93% post consumer content recycled rubber) –PQR-45B**	**0.125"**	**1/8"**	**3mm**
	T O T A L	**0.750"**	**3/4"**	**19mm**

-

System Description :

L.E.E.D contributors	**MRc7 : Certified Wood : 1005 FSC Bamboo**
	MRc6 : Rapidly Renewable Resource (5 year forest replenishment – harvest)
	MRc4 : Recycled Content : 93% post consumer content recycled rubber pad
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore certified, CA section 1350 tested
	IEQc4.1,4.2,4.4 : Low emitting materials (installer supplied)
	ID : Innovation in Design

Colors (4)	**Amber Edge grain** **FL-V5872PA-NAUF/FSC** **FL-V5872UA-NAUF/FSC**	**Natural Edge Grain** **FL-V5872PN-NAUF/FSC** **FL-V5872UN-NAUF/FSC**	**Amber Flat Grain** **FL-5872PA-NAUF/FSC** **FL-5872UA-NAUF/FSC**	**Natural Flat Grain FL-5872PN-NAUF/FSC FL-5872UN-NAUF/FSC**
Finishes (2)	**Jobsite finished = UN or UA**		**Prefinished = PN or PA**	
System Type	**Fixed resilient (glue down)**			
Subfloor Construction	**PlybooQuiet – acoustical padding (93% post consumer content recycled rubber padding)**			
Resilience	**PlybooQuiet - acoustical padding – 45 duro – product # PQR-45B**			
System Profile | Slab Depression	3/4"	0.750"		19mm
Sound Impact Insulation	**IIC rating = 54 (over 6" concrete)**		**IIC rating = 58 (over 6" concrete / 6"fiberglas)**	
Environmental Certifications	**FSC**	**L.E.E.D**		**FloorScore**
Warranty	**25 years**			

-

PlybooQuiet | www.plybooquiet.com | 866.835.9859 | info@plyboo.com

plybooQuiet™

FL-5872PPN-NAUF
FLAT GRAIN COCONUT

FL-5872PPN-SG-NAUF
FLAT GRAIN SUGAR

FL-P5872-PPE-NAUF
FLAT GRAIN EBINY

FL-P5872PPN-NAUF
EDGE GRAIN COCONUT

FL-P5872PPD-NAUF
FLAT GRAIN COCONUT DARK

FL-V5872PPN-SG
DECO PALM SUGAR

PlybooQuiet – PQ19 PALM

End View Detail

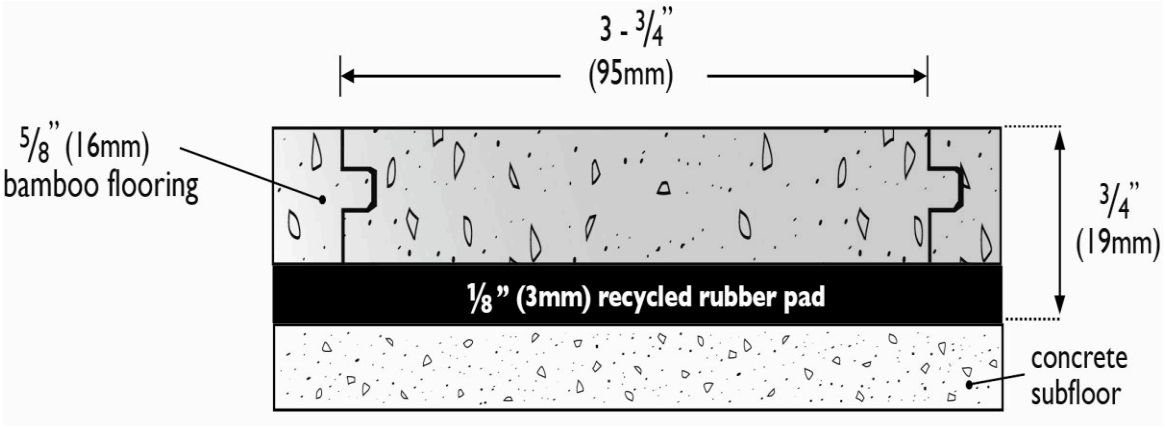

Top View Detail

System Components		Profile		
top	Durapalm Athletic Surface 5/8"x3"x 24" to 72" (16mm x 76m x 610mm to 1828mm)	0.625"	5/8"	16mm
base	1 layer of 1/8" PlybooFit sports padding (93% post consumer content recycled rubber padding)	0.125"	1/8"	3mm
	T O T A L	0.750"	3/4"	19mm

System Description :

L.E.E.D. contributors	MRc7 : Certified Wood ; FSC Palm					
	MRc7 : FSC sub-floor : installer supplied)					
	MRc3 : Reclaimed Agrifiber (recovered Palm tree turnck)					
	MRc4 ; Recycled Content : 95% post consumer content recycled rubber padding					
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore Certified – section1350					
	IEQc4.1,4.2, 4.4 Low emitting materials (installer supplied)					
	ID : Innovation in Design					
Colors (6)	Flat Grain Coconut	Flat Grain Sugar	Flat Grain Coconut Dark	Flat Grain Ebony	Edge Grain Ebony	DecoPalm Sugar
Finishes (1)	Prefinished					
System Type	Fixed resilient (glue down)					
Subfloor Construction	PlybooQuiet - acoustical padding (93% post consumer content recycled rubber) –					
Resilience	PlybooQuiet- acoustical padding – 45 duro – product # PFR45B					
System Profile l Slab Depression	3/4"	0.750"	19mm			
Sound Impact Insulation	IIC rating = 54 (over 6" concrete)		IIC rating = 58 (over 6' concrete/6" fiberglass)			
Industry Compliance	Fitness	Exercise	Yoga	Stage	Dance	
Environmental Certifications	FSC	L.E.E.D	FloorScore			
Warranty	25 years					

PlybooQuiet : www.plybooquiet.com : 866.835.9859 : info@plyboo.com

bamboo Quiet™

A,mberSquared
FL-EG-5836PA
FL-EG-5836UA-NAUF/FSC

NaturalSquared
FL-EG5836PN
FL-EG5836UN-NAUF/FSC

Foundation Brown Squared
FL-EG5836FB

Luminous Gray Squared
FL-EG5836LG

BambooQuiet Squared : BQ19-Squared

End View Detail

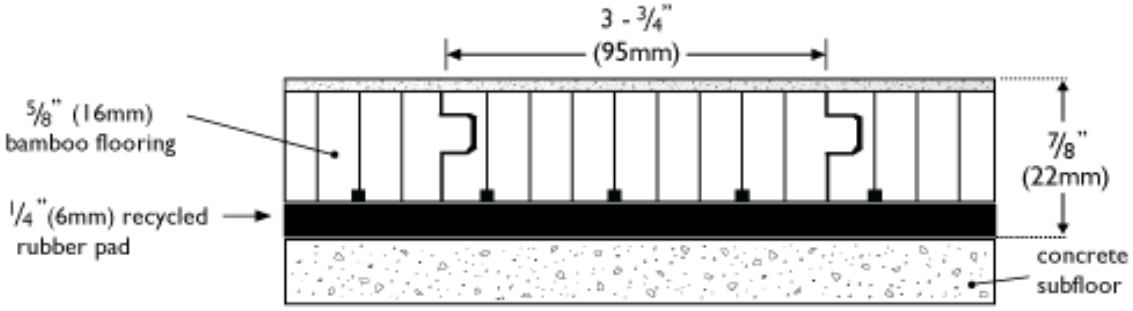

Top View Detail

System Components :

Top	**Plyboo bamboo surface** **16mm x 95 mm x 960mm** Amber and Natural Squared	**16mm**
Base	**1 layer of 3mm BambooQuiet acoustical padding** **+ chemical DPM painted onto concrete**	**3mm**
	T O T A L	**19mm**

System Description :

L.E.E.D. contributors	**MRc7 : Certified Wood : 100% FSC : Bamboo**			
	MRc6 : Rapidly Renewable			
	IEQc4.3 : Low emitting materials (manufacturing) FloorScore certified, CA section 01350 tested			
	IEQc4.1,4.2, 4.4 (installer supplied)			
	IEQc6.1,6.2 (recycled content : 93% post consumer content (recycled rubber padding)			
	ID Innovation in Design + FloorScore certified			
Colors (4)	**Amber Squared** **FL-EG5836PA** **FL-EG5836UA**	**Natural Squared** **FL-EG5836PN** **FL-EG5836UN**	**Foundation Brown Squared** FL-EG5836FB (prefinished only)	**Luminous Gray Squared** FL-EG5836LG **(prefinished only)**
Finishes (2)	**Jobsite finished = UN or UA**	**Prefinished = PN or PA**		
System Type	**Fixed resilient (glue down)**			
Subfloor Construction	**PlybooQuiet - acoustical padding (93% post consumer content recycled rubber) –**			
Resilience	**PlybooQuiet- acoustical padding – 45 duro (93% post consumer content recycled rubber) – product # PFR45B**			
System Profile | Slab Depression	**3/4"**	**0.750"**	**19mm**	
Industry Compliance	**Fitness**	**Exercise**	**Yoga**	**Stage**	**Dance**
Environmental Certifications	**FSC**	**L.E.E.D**	**FloorScore**	
Warranty	**25 years**			

PlybooQuiet : www.plybooquiet.com : 866.835.9859 : info@plyboo.com

plybooQuiet™

FL-P5872SG/CL-NAUF/FSC
CERUSED TAUPE

FL-P5872EPD/CL-NAUF/FSC
CERUSED ECLIPSE

FL-P5872WPH/CL-NAUF/FSC
CERUSED PEARL

FL-P5872EPDPC-NAUF/FSC
CERUSED ESPRESSO


FL-P5872PDA/CL-NAUF/FSC
BRUSHED SAHARA

FL-P5872PDA/CL-NAUF/FSC
BRUSHED HAVANA

PlybooQuiet – PQ18-StilettoClic

End View Detail

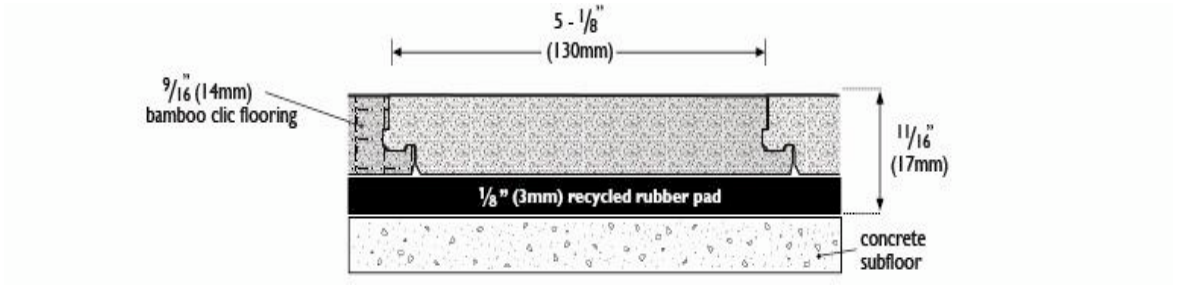

Top View Detail

System Components		Profile		
top	StilettoStrand Bamboo Surface 9/16"x5 1/8"x 72" (16mm x 130mm x 1,830mm)	0.562"	9/16"	14+mm
base	1 layer of 1/8" PlybooFit sports padding (93% post consumer content recycled rubber padding)	0.125"	1/8"	3mm
	T O T A L	0.687"	11/16"	18mm

System Description :

L.E.E.D. contributors	MRc7 : Certified Wood ; 100% FSC Bamboo					
	MRc7 : FSC sub-floor : installer supplied)					
	MRc6 : Rapidly Renewable Resource : (5 year forest replenishment – harvest)					
	MRc4 ; Recycled Content : 95% post consumer content recycled rubber padding					
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore Certified – section1350					
	IEQc4.1,4.2, 4.4 Low emitting materials (installer supplied)					
	ID : Innovation in Design					
Colors (6)	Cerused Taupe FL-P5872SG-CL	Cerused Eclipse Fl-P5872EPD/CL	CerusedPearl FL-P5872WPH-CL	Cerused Espresso FL-P5872EPDPC-	Brushed Sahara FL-P5872PDA-CL	Brushed Havana FL-P5872PDA-CL
Finishes (2)	Prefinished					
System Type	Floating reeilient					
Subfloor Construction	PlybooQuiet - acoustical padding (93% post consumer content recycled rubber)					
Resilience	PlybooQuiet- acoustical padding – 45 duro – product # PFR45B					
System Profile l Slab Depression	11/16"	0.687"		18mm		
Sound Impact Insulation	IIC rating = 54 (over 6" concrete)			IIC rating = 58 (over 6' concrete/6" fiberglass)		
Industry Compliance	Fitness	Exercise	Yoga	Stage	Dance	
Environmental Certifications	FSC		L.E.E.D	FloorScore		
Warranty	25 years					

PlybooQuiet : www.plybooquiet.com : 866.835.9859 : info@plyboo.com

plybooQuiet™

HAVANA NEOPOLITAN SAHARA Top View Detail

PlybooQuiet : PQ18 Strand | PQ18-StrandClic

-

End View Detail : PQ18-Strand

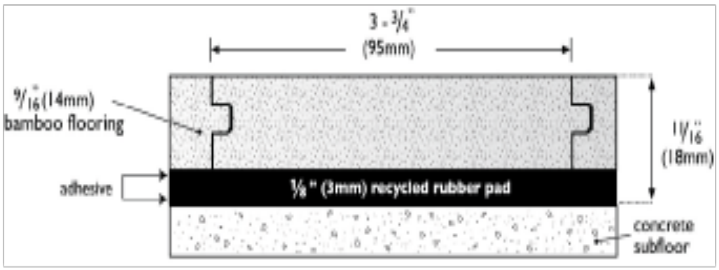

End View Detail : PQ18-StrandClic

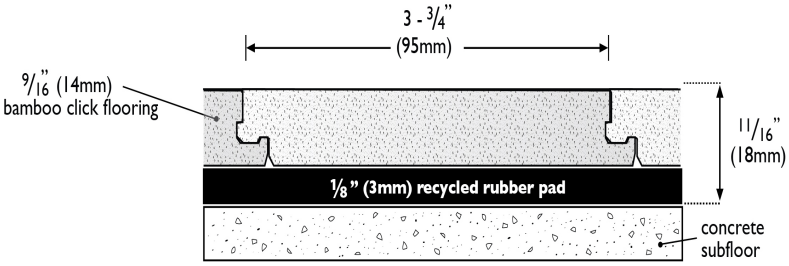

-

System Components :		Profile		
top	**Plyboo Strand Bamboo : 9/16" surface** **9/16"x3 ¾"x72"** (40mm x 95mm x 1830mm)	**0.562"**	**9/16"**	**14mm**
base	**1 layer of 1/8" PlybooQuietCush acoustical padding** **(93% post consumer content recycled rubber) – PQR-45B**	**0.125"**	**1/8"**	**3mm**
	T O T A L	**0.687"**	**11/16"**	**17.5mm**

-

System Description :

L.E.E.D contributors	**MRc7 : Certified Wood : 100% FSC Bamboo**		
	MRc6 : Rapidly Renewable Resource (5.5 year forest replenishment – harvest)		
	MRc4 : Recycled Content : 93% post consumer content recycled rubber pad		
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore certified, CA section 01350		
	IEQc4.1,4.2,4.4 : Low emitting materials (installer supplied)		
	ID : Innovation in Design		
Colors (3)	**Havana Strand** **FL-P5872PD-NAUF/FSC** **FL-P5872PD-CL-NAUF/FSC**	**NeopolitanStrand** **FL-P5872NEO-NAUF/FSC** **FL-P5872NEO-CL-NAUF/FSC**	**SaharaStrand** **FL-P5872PH-NAUF/FSC** **FL-P5872PH-CL-NAUF/FSC**
Finishes (1)	**9/16" x 3-3/4" x 72" Plyboo Strand : available pre-finished**		
System Type	**Fixed resilient (glue down)**	Floating resilient (clic-loc)	
Subfloor Construction	**PlybooQuiet – acoustical padding (93% post consumer content recycled rubber)**		
Resilience	**PlybooQuiet – acoustical padding – 45 duro – Product # PQR-45B**		
System Profile	**11/16"**	**0.687"**	**18mm**
Sound Impact Insulation	**IIC = 54 (over 6" concrete)**	**IIC= 58 (over 6" concrete / 6" fiberglas)**	
Environmental Certifications	**FSC**	**FloorScore**	**L.E.E.D**
Warranty	**25 years**		

-

PlybooQuiet | www.plybooquiet.com | 866.835.9859 | sales@plyboo.com

plybooQuiet™

HAVANA NEOPOLITAN SAHARA Top View Detail

PlybooQuiet : PQ-13 Strand | PQ13-StrandClic

-

End View Detail : PQ-13 Strand

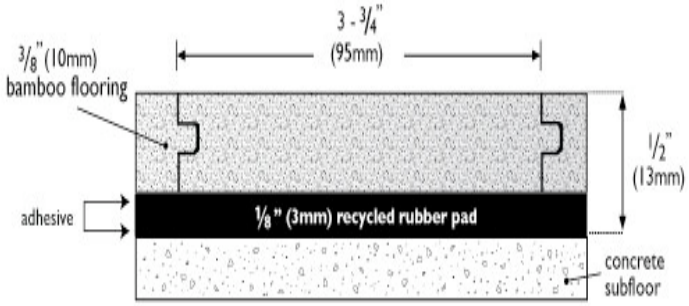

End View Detail : PQ-13 StrandClic

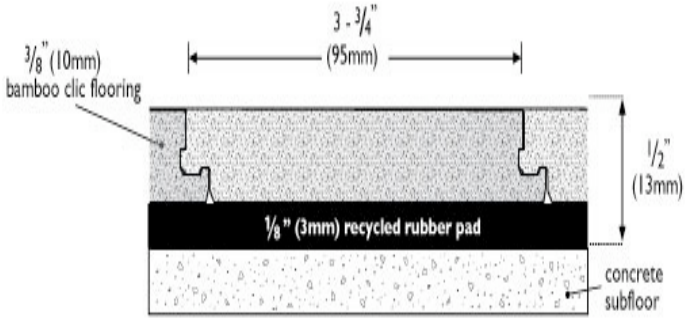

-

System Components :

		Profile		
top	**Plyboo Strand Bamboo : 3/8" surface** **3/8"x3 ¾"x36"** (10mm x 95mm x 915mm)	**0.375"**	**3/8"**	**10mm**
base	**1 layer of 1/8" PlybooQuiet acoustical padding** **(93% post consumer content recycled rubber) – PQE-45B**	**0.125"**	**1/8"**	**3mm**
	T O T A L	**0.500"**	**1/2"**	**13mm**

-

System Description :

L.E.E.D contributors	**MRc7 : Certified Wood : 100% FSC Bamboo**		
	MRc6 : Rapidly Renewable Resource (5 year forest replenishment – harvest)		
	MRc4 : Recycled Content : 93% post consumer content recycled rubber pad		
	IEQc4.3 : Low emitting materials (manufacturing) + FloorScore certified, CA section 1350 tested		
	IEQc4.1,4.2,4.4 : Low emitting materials (installer supplied)		
	ID : Innovation in Design		
Colors (3)	**Havana Strand** **FL-P3836PD-NAUF/FSC** **FL-P3836PD-CL-NAUF/FSC**	**NeopolitanStrand** **FL-P3836NEO-NAUF/FSC** **FL-P3836NEO-CL-NAUF/FSC**	**SaharaStrand** **FL-P3836PH-NAUF/FSC** **FL-P3836PH-CL-NAUF/FSC**
Finishes (1)	**3/8" x 3-3/4" x 36" Plyboo Strand : available pre-finished only**		
System Type (2)	**Fixed resilient (glue-down)**	Floating resilient (clic-loc)	
Subfloor Construction	**PlybooQuiet – acoustical padding (93% post consumer content recycled rubber)**		
Resilience	**PlybooQuiet – acoustical padding – 45 duro – Product # PQR-45B**		
System Profile	**1/2"**	**0.500"**	**13mm**
Sound Impact Insulation	**IIC rating = 54 (over 6" concrete)**	**IIC rating = 60 (over 6" concrete / 6" fiberglas ceiling)**	
Environmental Certifications	**FSC**	**FloorScore**	**L.E.E.D.**
Warranty	**25 years**		

-

PlybooQuiet | www.plybooquiet.com | 866.835.9859 | sales@plyboo.com

PLYBOO®

SPORT™

PlybooSport is:

Soybond Manufactured FSC® and FloorScore® Certified Formaldehyde Free

- L.E.E.D. Contributions: MR6, MR7, IEQ4
- Average Hardness greater than Maple
- Consistent lighter color and 6' lengths
- Precision Milling, Fit, and Finish
- Exceeds visual rating of Grade 1 Maple
- Priced competitvely to Grade 1 Maple
- ASTM, EN, FIBA, DIN Compliant
- 25 year warranty

Edge Grain, Natural
FL-V3472SFN-NAUF/FSC

Edge Grain, Amber
FL-V3472SFA-NAUF/FSC
(minimum order 2,500 sq. ft.)

Dimensions:

U.S. Standards/ Metric

3/4" x 2 1/4" x 72" (19mm x 57mm x 1829mm)

1 1/4 sq. ft./board (0.104 m^2/board)

20 boards/box

22.5 sq. ft./box (2.09 m^2/box)

Weight:

U.S. Standards/ Metric

2.53 lbs/sq. ft. (1.235 kg/m^2)

2.85 lbs/board (1.29 kg/board)

57 lbs/box (25.9 kg/box)

50 boxes/pallets

2,930 lbs/pallet (1, 329 kg/pallet)

L.E.E.D. Contributions

Manufacturer:

MRc4: Recycled Materials (Rubber Pad)

MRc6: Rapidly Renewable Materials

MRc7: FSC® Certified (SW-COC-003124)

IEQc4.3: Low-Emitting Materials

CA Section 01350 Compliant

FloorScore® Certified (SCS-FS-02130)

Installer Supplied:

MRc7: FSC-Certified Subfloor Materials

IEQ 4.1, 4.2: Low-Emitting Materials

Floating Resilient Sleeper

PS-3.125-CP

- ☐ Soft Touch–Y
- ☐ Multi-Use–W
- ☐ Pro–B

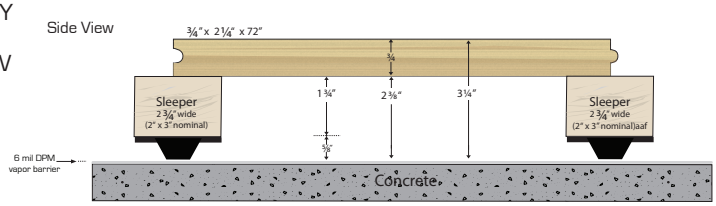

*Only use a DPM vapor barrier over a concrete subfloor

Floating Resilient Sleeper + Panel

PS-3.625-CP

- ☐ Soft Touch–Y
- ☐ Multi-Use–W
- ☐ Pro–B

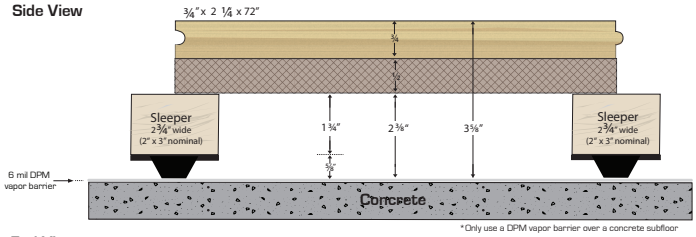

*Only use a DPM vapor barrier over a concrete subfloor

Floating Resilient Panel

PS-1.875CP, PS-1.937-CP, PS-2.125-CP, PS-2.375-CP

- ☐ Soft Touch–Y
- ☐ Multi-Use–W
- ☐ Pro–B

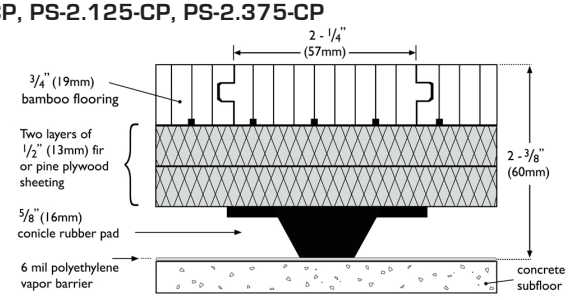

Fixed Resilient Anchored

PS-2.125A-CP; PS-2.375A-CP

- ☐ Soft Touch–Y
- ☐ Multi-Use–W
- ☐ Pro–B

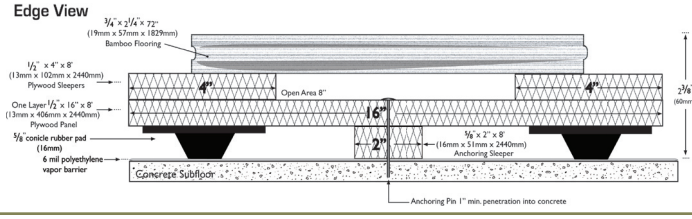

Fixed Resilient PlybooFiT

PF-3472-1.0

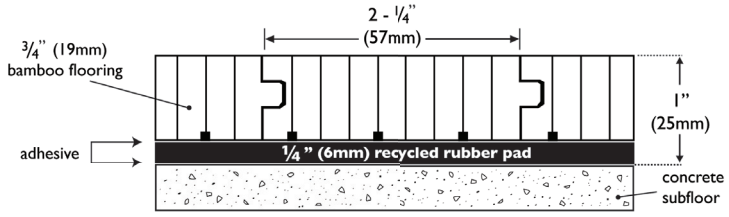

SoyBond™ flooring and plywood

floor score
Cert.# SCS-FS-02130
As Certified by
SCIENTIFIC CERTIFICATION SYSTEMS

FSC
www.fsc.org
FSC® C012079
The mark of responsible forestry

www.plyboosport.com | 800-939-7397 | lear@plyboosport.com